


① IRIS CABLE		(+) RED	INPUT VOLTAGE
		(-) BLACK	GROUND
		WHITE	VIDEO SIGNAL
		GREEN	REMOTE CONTROL

② MOTOR CABLE		(+) GREEN	FOCUS NEAR
		(+) BLACK	FOCUS FAR
		(+) YELLOW	ZOOM IN
		(+) RED	ZOOM OUT

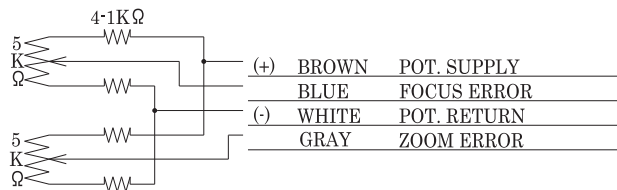


### SPECIFICATION


1. USE	FOR 1/2" COLOR .B/W CAMERA		
2. FOCAL LENGTH	f=30 ~750mm		
3. IRIS RANGE	F= 4.6 ~720		
4. IMAGE SIZE	φ 8 (6.4 x 4.8)		
5. BACK FOCAL LENGTH	35.4 mm in air		
6. FLANGE FOCAL LENGTH	17.526 mm in air		
7. FOCUS RANGE	∞ ~2.5 m		
8. FIELD ANGLE	DIA.	(W)	14.6 ° (T) 0.62 °
	HOL.		11.8 ° 0.50 °
	VER.		8.8 ° 0.37 °
9. DISTORTION (TV)	0.10 %		0.20 %
10. LENS CONSTRUCTION	12 GROUPS 16ELEMENTS		
11. CLEAR APERTURE	FRONT	φ 104	REAR φ 11.7
12. WEIGHT	2.72Kg (XAP)		

### DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω (20° C)	
	COLOR	RED(+)	4pin
BRAKE COIL	RESISTOR	1150 Ω (20° C)	
	COLOR	BLACK	3pin
		YELLOW(+)	2pin
		GREEN	1pin
DRIVE VOLT.	OPEN	LESS THAN +4V	
	CLOSE	OVER THAN OV	
		W/CLOSING SPRING	



GAZ30750

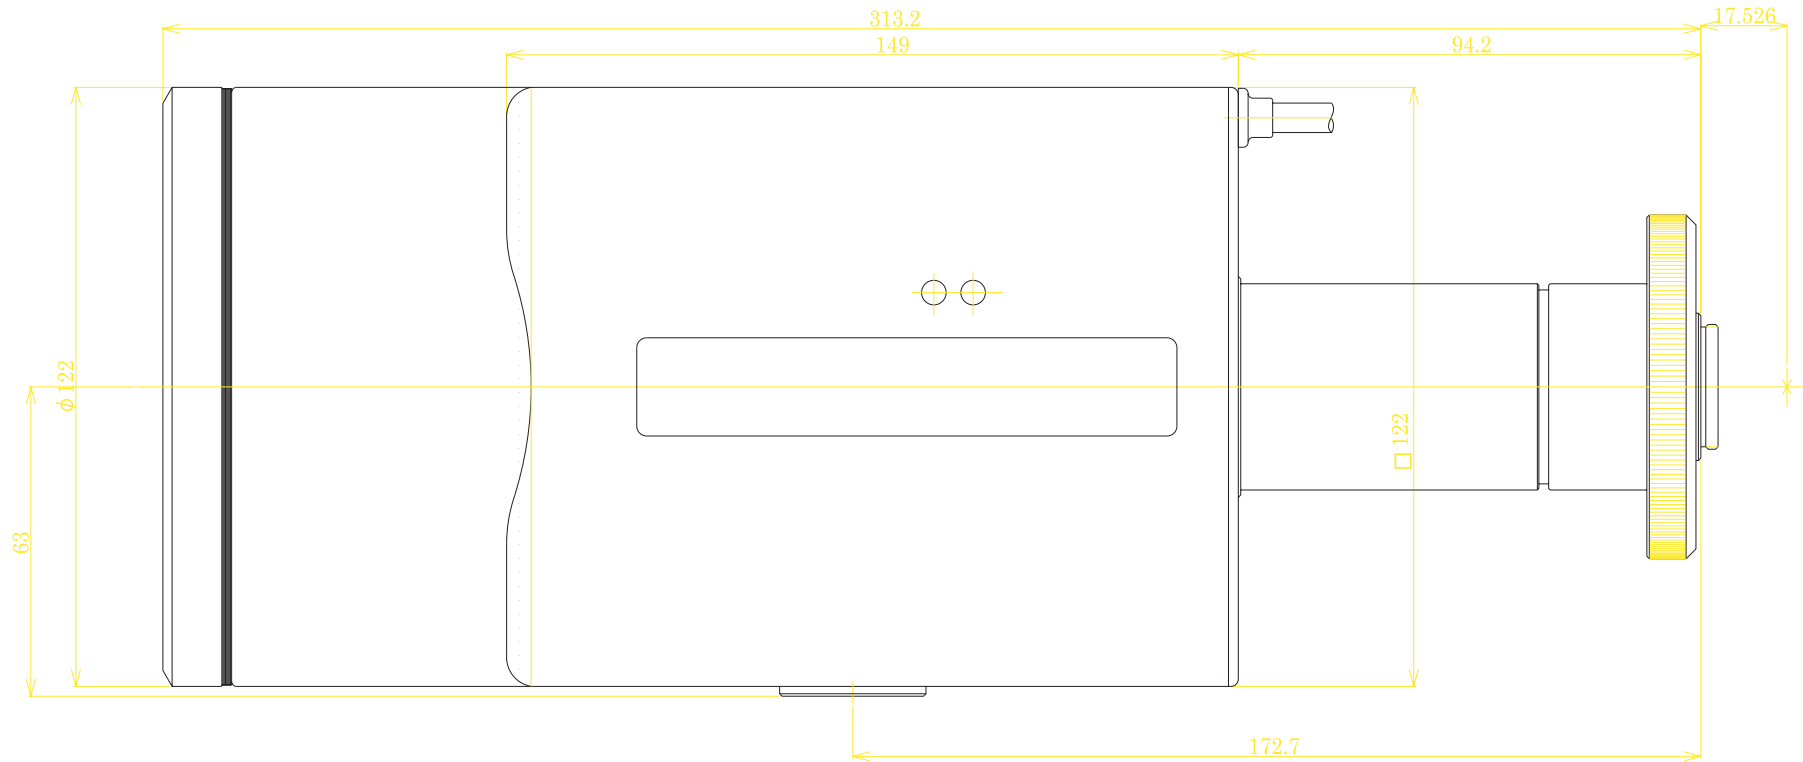


### SPECIFICATION

1. USE	FOR 1/2" COLOR .B/W CAMERA		
2. FOCAL LENGTH	f=30 ~750mm		
3. IRIS RANGE	F= 4.6 ~720		
4. IMAGE SIZE	φ 8 (6.4 x 4.8)		
5. BACK FOCAL LENGTH	35.4 mm in air		
6. FLANGE FOCAL LENGTH	17.526 mm in air		
7. FOCUS RANGE	∞~2.5 m		
8. FIELD ANGLE	DIA.	(W)	14.6 ° (T) 0.62 °
	HOL.		11.8 ° 0.50 °
	VER.		8.8 ° 0.37 °
9. DISTORTION (TV)	0.10 %	0.20 %	
10. LENS CONSTRUCTION	12	GROUPS16 ELEMENTS	
11. CLEAR APERTURE	FRONT	φ 104	REAR φ 11.7
12. WEIGHT	2.72Kg (XAP)		

### ② MOTOR CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT
(+) WHITE	IRIS OPEN
(+) BROWN	IRIS CLOSE

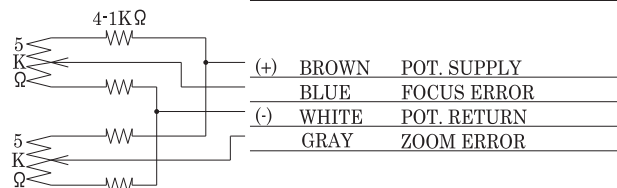

品名 GAZ30750

部番