


① IRIS CABLE

| | | |
|-----|-------|----------------|
| (+) | RED | INPUT VOLTAGE |
| (-) | BLACK | GROUND |
| | WHITE | VIDEO SIGNAL |
| | GREEN | REMOTE CONTROL |

② MOTOR CABLE

| | | |
|-----|--------|------------|
| (+) | GREEN | FOCUS NEAR |
| (+) | BLACK | FOCUS FAR |
| (+) | YELLOW | ZOOM IN |
| (+) | RED | ZOOM OUT |

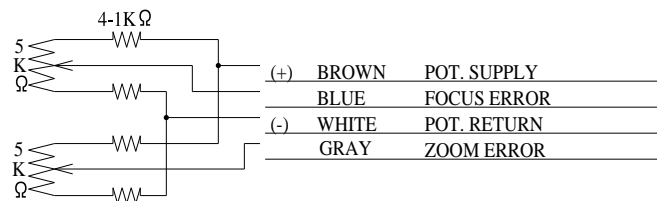


SPECIFICATION

| | | | |
|-----|-------------------------|----------------------------|-------------------|
| 1. | USE | FOR 1/3" COLOR ,B/W CAMERA | |
| 2. | FOCAL LENGTH | f= 5.6 ~ 112 mm | |
| 3. | IRIS RANGE | F= 1.6 ~ 360 | |
| 4. | IMAGE SIZE | φ 6 (4.8 x 3.6) | |
| 5. | BACK FOCAL LENGTH | 8.97 mm in air | |
| 6. | FLANGE FOCAL LENGTH | 12.5 mm in air | |
| 7. | FOCUS RANGE | ∞ ~ 1.5 m | |
| 8. | FIELD ANGLE | DIA. (W) | 59.4 ° (T) 3.18 ° |
| | | HOL. | 47.6 ° 2.55 ° |
| | | VER. | 35.7 ° 1.92 ° |
| 9. | FIELD OF VIEW AT M.O.D. | DIA. | 1,605 mm 80.4 mm |
| | | HOL. | 1,254 mm 64.4 mm |
| | | VER. | 925 mm 48.4 mm |
| 10. | DISTORTION | -2.9% | 0.3 % |
| 11. | LENS CONSTRUCTION | 12 GROUPS 14 ELEMENTS | |
| 12. | CLEAR APERTURE | FRONT φ 49 | REAR φ 11.8 |
| 13. | EXIT PUPIL POSITION | 113 mm (format) | |
| 14. | WEIGHT | 550 g (570 g) | |

DC (DIRECT CONTROL)

| | | |
|------------|-------------|--|
| DRIVE COIL | RESISTOR | 190 Ω (20° C) |
| | COLOR | RED(+) 4pin BLACK 3pin |
| BRAKE COIL | RESISTOR | 1150 Ω (20° C) |
| | COLOR | YELLOW(+) 2pin GREEN 1pin |
| | DRIVE VOLT. | OPEN LESS THAN +4V CLOSE OVER THAN OV W/CLOSING SPRING |



品名 GAZ56112

部番